




Document Solutions

> PRINT > COPY > SCAN > FAX

ECOSYS M8130cidn

COLOR  
MULTIFUNCTION PRODUCT  
FOR A4/A3 FORMAT

NEW DESIGN  
NEW DEFINITION

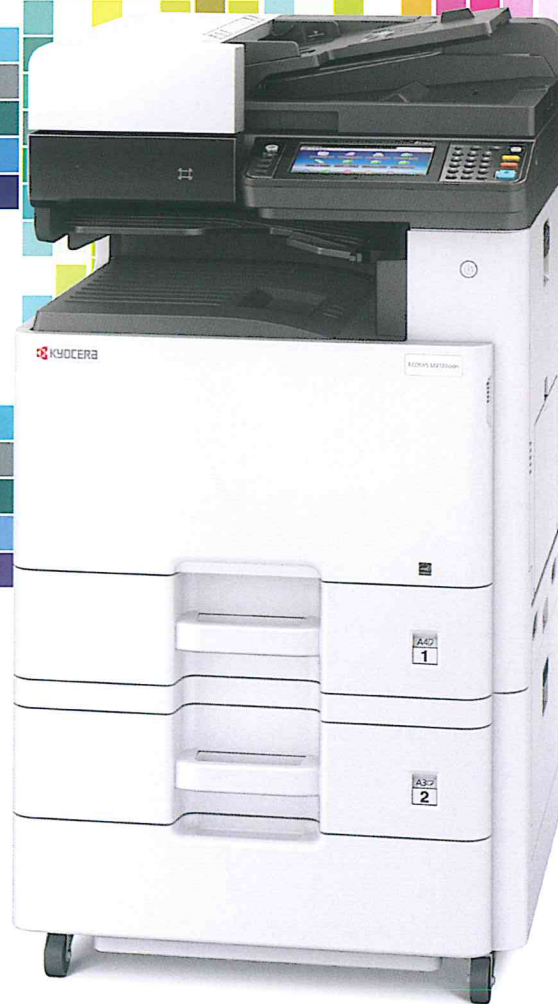

KYOCERA MyPanel

Mobile Print



Cloud Connect



- Breakthrough design for easy use, control and service.
- High image quality with 1,200 x 1,200 dpi print resolution.
- Fast first copy time (mono: 6.5 seconds; color: 8.3 seconds).
- Excellent clarity 7-inch color touch panel display\*.
- Fast scanning up to 50/50 ipm A4 Mono/Color.
- Convenient wireless LAN interface\*.
- Support Air Print and Mopria certified.
- Long life drum and replacement parts provide efficiency and reliability.
- Compact design and low noise emission.



\*Optional



		Main Specifications
Model		ECOSYS M8130cidn
Main Function		Copy, Print, Scan, Fax (Optional)
Writing Method		Semiconductor Laser
CPU		ARM Cortex-A9 (Dual Core) 1.2GHz
Print Speed (A4) (Mono/Color)		30/30 ppm
Scanning Speed (A4) 300dpi	Simplex(Mono/Color)	50/50 ipm
	Duplex(Mono/Color)	16/16 ipm
Memory		Standard 1.5GB (Max. 3GB)
SSD Capacity		SSD 32GB (Optional) / SSD 128GB (Optional)
Warm Up Time		30 seconds or less
Paper Capacity	Standard	600 sheets [1 x 500 sheets (Cassette) + 100 sheets (MPT)]
	Maximum	1,600 sheets (Main Unit + 2 x 500 sheets PF-471 x1 + MPT)
Paper Size	Cassette	Min. A5R - Max. A3 (Ledger)
	MPT	Min. A6R - Max. A3 (Ledger)
Paper Weight	Cassette	60 - 256 g/m <sup>2</sup>
	MPT	60 - 256 g/m <sup>2</sup>
Duplex Printing		Paper size: A5R - A3; Paper weight: 60 - 220 g/m <sup>2</sup>
Output Capacity		Max. 250 sheets + 30 sheets with standard Job Separator
Control Panel		7-inch Color Touch LCD Panel
Document Processor		Standard (Max. 50 sheets RADF Type)
Dimension (W x D x H) (Main Unit)		590mm x 590mm x 753mm (with DP)
Weight (Main Unit)		Approx. 79 kg
Power Consumption (Standard configuration)	Copy/Print Mode	580W
	Stand-by Mode	80W
	Energy Saver	0.5W
Noise (ISO7779/ ISO9296)	Copy/Print Mode	54dB(A)
	Stand-by Mode	34dB(A)
<b>Copy Functions (Standard)</b>		
Copy Size		Max. A3 (Ledger) - Min. A6R
Resolution		600 x 600 dpi
First Copy Time (Mono/Color)		6.5/ 8.3 seconds
Zoom Ratio	Manual	25% - 400% (1% per Step)
	Pre-defined	5R5E
Multiple Copy		1 - 999
<b>Print Functions (Standard)</b>		
Resolution		600 x 600 dpi; 1,200 x 1,200 dpi
PDL		PRESCRIBE, PCL6, KPD3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7
First Print Out Time (Mono/Color)		6.5/ 8.3 seconds
Network Printing		TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP over SSL, WSD Print, Apple Bonjour
Operating System Supported		Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Vista, Windows 7, Windows 8, Windows 8.1, Windows 10; Apple Macintosh OS X 10.5 or later; Linux
Interface		USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-TX/1000BASE-T; USB Host Interface (USB Host)x2; NFC TAGx1; 802.11 b/g/n/Wireless LAN/WiFi Direct (Optional)
USB Memory Printing Format		TIFF, JPEG, PDF, XPS, Open XPS
Mobile Printing		AirPrint, Mopria, KYOCERA Mobile Print
<b>Scan Functions (Standard)</b>		
Color Selection		Auto Color (Color/Gray); Auto Color (Color/B&W); Full Color; Grayscale; Black & White
Resolution		600dpi, 400dpi, 300dpi, 200dpi, 200x400dpi, 200x100dpi
File Format		TIFF, JPEG, XPS, OpenXPS, PDF (High-compression PDF)
Image Type Mode		Text, Photo, Text + Photo, Light Text (Fine Line)
Transmission Type		Scan to SMB; Scan to E-mail (SMTP, SMTP over SSL); Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan; WIA Scan
Address Storage		200 addresses (Common address list), 50 groups (Group address list)
<b>Fax Functions (Optional)</b>		
Original Size		Max. A3 (Ledger) - Min. A5 (Statement)
Coding Method		MMR, MR, MH, JBIG
Transmission Speed		33.6 kbps
Memory		12MB
Network FAX		Yes
<b>Consumables &amp; Options</b>		
Toner Kit		TK-8110 (C/M/Y/K)
Maintenance Kit		MK-8115 (A/B); DP: MK-6110
Paper Feeder		PF-470: 500 sheets x1; PF-471: 500 sheets x2
Finisher (ECOSYS M8130cidn / ECOSYS M4132idn only)		DF-470: 500 sheets Hanger Type Finisher; AK-470: Attachment Kit for DF-470
Fax System		Fax System 13
Storage Device		HD-6: SSD 32GB; HD-7: SSD 128GB
Data Security		Data Security Kit(E)
Card Authentication		Card Authentication Kit(B)
Gigabit Ethernet Board		IB-50: For Additional Network
Wireless LAN Interface		IB-36 (802.11 b/g/n/Wireless LAN/WiFi Direct)



บริษัท เคียวเซระ ด็อกคิวเม้นท์ โซลูชันส์ (ประเทศไทย) จำกัด  
โทร. 0-2586-0333 โทรสาร 0-2586-0278  
www.kyoceradocumentsolutions.co.th

KYOCERA Business Partner

\*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.